

NONLINEAR MODELLING AND ANALYSIS OF MOVING TRAIN LOADS ON INTERSPERSED RAILWAY TRACKS

Sakdirat Kaewunruen¹, Tomasz Lewandrowski², and Kritditorn Chamniprasart³

¹ Birmingham Centre for Railway Research and Education, School of Civil Engineering
The University of Birmingham, Edgbaston, B15 2TT UK
e-mail: s.kaewunruen@bham.ac.uk

² Military University of Technology in Warsaw
Warsaw, Poland
tomaszlewandrowski@gmail.com


³ Department of Mechanical Engineering, Faculty of Engineering, Chulalongkorn University
Bangkok, Thailand
kritditorn.ch@gmail.com

Keywords: interspersed track, timber sleeper, concrete sleeper, moving load, envelop analysis, dynamic response, dynamic factor, nonlinear transient analysis, tensionless support.

Abstract. *The interspersed pattern sleeper of railway track, which is a replacement of old timber sleeper with concrete, is often used as a temporary maintenance for second or third class railway lines with aging timber sleepers. However, their negative effect on the railway has to be taken into an account. The numerical simulations of interspersed sleeper railway tracks are conducted as well as the plain ones using a finite element program, STRAND7, so that the precise numerical models can be established. Two moving point loads, 100 kN each, are simulated to represent a passenger train bogie moving along each rail in 2 dimensional plane. Dynamic displacements and accelerations of all sleepers are then evaluated. Sensitivity analyses are carried out by varying the speed of the moving train loads from 5 km/h to 120 km/h and by changing the type of the interspersed patterns to determine the dynamic behaviours that can cause any more rapid deterioration of the interspersed tracks compared with plain railway tracks. The results demonstrate the potential sources of structural vibrations that will swiftly degrade the interspersed railway tracks. The insight will help track engineers to plan predictive maintenance and inspection of the interspersed railway tracks in live operational networks.*

1 INTRODUCTION

Timber components have for a long time been used as railway sleepers for a railway track in many parts of railway networks around the world. As the timber sleeper life span is around 15-20 years depending on application and maintenance, such timber sleepers will be required for maintenance or even a huge replacement at certain point in time. Also, unless used in low speed operation, timber sleepers require a strengthening for enhancement in ability to withstand high velocity operations or to restrain longitudinal rail forces preventing a track buckling. “Interspersed” is a method that can be used as a measure against these problems. Interspersed railway track can be built by re-sleeping old and rotten timber sleepers and replace it with concrete sleepers [1]. Due to differential track stiffness, deterioration process, and operational parameter, many patterns of interspersed railway tracks have been introduced i.e. 1 in 2, 1 in 3, 1 in 4 and so on (which mean there is 1 concrete sleeper in every indicated number of sleeper such as 1 in 4 mean 1 concrete sleeper in every 4 sleepers including the concrete itself). It is important to note that this type of railway track mainly existed in a second or third class of railway tracks with low operational speeds.

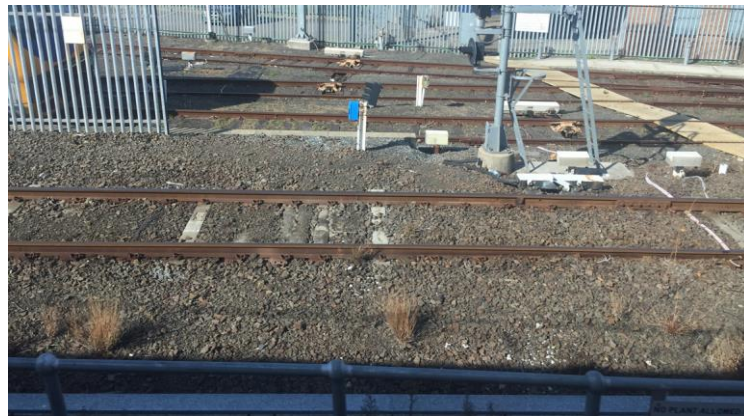

(TOP)



(BOTTOM)

Figure 1: Deteriorated interspersed railway track (Top: mud pumping, and Bottom: ballast pulverisation and ballast dilation)

The key reason is that this type of track has various flaws derived from how it is built. The replacement of old timber sleepers is frequently done over old and soft existed formation, which has been in services for so long, by installing new stiff concrete sleepers in its existing place. This can result in soil foundation failure, track stiffness inconsistency (as it made up of

both concrete and timber sleepers), and differential track decay rate [2]. These can impair the long-term performance of interspersed railway tracks as shown in Figure 1. Figure 1 shows the conditions of interspersed railway tracks under low-speed operations (<25 km/h). The tracks have been commissioned between 2006 and 2008 and have served as a link to maintenance junctions. The photos were taken in April 2016 during a site visit.

The serviceability limit state (or dynamic performance) has become the governing criteria for sleepers made of different material properties in the existing aged track systems. Note that this method is sometimes called ‘spot replacement’ or ‘intersperse method’. It is important to note that a general recommendation (e.g. by Australian Office of Transport Safety Investigations) is to perform concrete sleeper installation only ‘in-face’ (i.e. the practice of installing the same sleeper type continuously rather than interspersed with other sleepers in between, also referred to as ‘on-face’) [3-4]. This paper aims at investigating the nonlinear dynamic behaviours of the interspersed railway tracks. Based on critical literature review, this research has never been presented in open literature [3-6]. The insight into this practice will help rail track engineers to enable truly predictive track maintenance, enhance smarter track inspection regimes, and improve reliability of infrastructure assets in uncertain settings.

2 NONLINEAR FINITE ELEMENT MODELING

A 2D Timoshenko beam is selected as a beam model because it was found to be one of the most suitable options for modelling concrete sleeper [5]. For both rail track and sleeper they were designed as a beam element in finite model so shear and flexural deformation can be included in computation [6]. The rail pads at the rail seat are simulated by using series of spring dash-pot elements. In order to replicate ballast supports, non-linear tensionless beam support is used. The tensionless support can correctly demonstrate ballast under the sleeper as this attribute allow beam to lift over the support while the tensile support is omitted [6-8]. For train on the rail track, it is simplified to 2 points loads with 100kN in magnitude, 2m apart, on each side of the rail track (4 point loads in total), to enable envelop analysis (maximum responses). Figure 2 shows the illustration of the model.

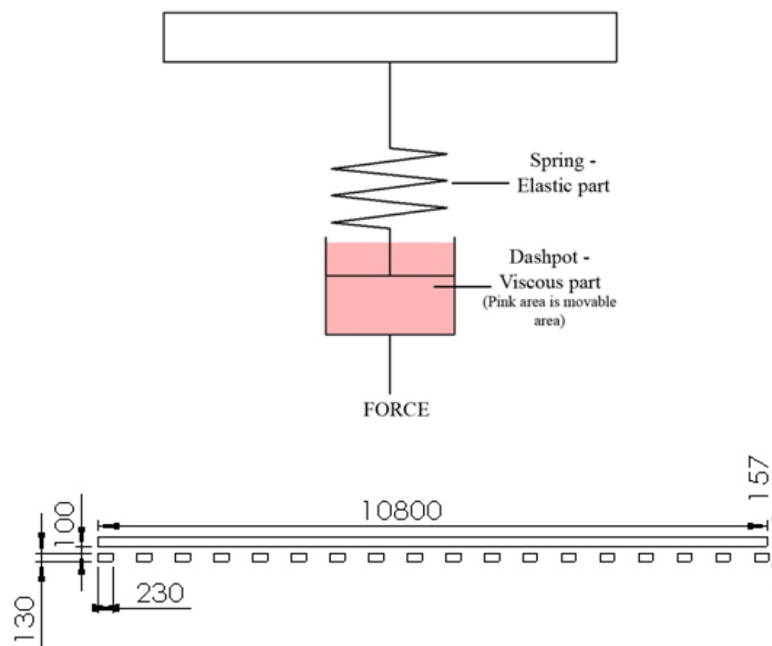


Figure 2: Schematics of interspersed railway track modelling

The numerical simulation is conducted using non-linear transient dynamic solver in Strand7 to enable tensionless capability of ballast. The nonlinear iteration (Newton Raphson) has been used to compute the ballast contact and support. The model has been validated earlier using experimental parameters, field data and previous laboratory results [9-15].

3 DYNAMIC MOVING LOAD ANALYSIS

The effects of train velocity on the maximum responses of sleepers can be seen in Figure 3. The train speeds from 5 to 120 km/h have been investigated as shown in Figures 4 and 5. It is clear that the timber track has higher deformation. At rail seat, the relative uplifts of the sleepers tend to cause deteriorations of railway tracks over time. Figure 4 demonstrates the dynamic effects of interspersing methods coupled with train speeds on the maximum displacement responses of sleepers at mid span. Considering the sleepers' responses, it is clear that timber sleepers deform vertically lower than interspersed or concrete sleepers. However, the concrete sleepers in either plain or interspersed tracks tend to deform significantly at their mid span. Such the deformations can cause centerbound problems or the issue with cracks at the midspan of sleepers. This issue is commonly found in railway tracks with poor maintenance. On this ground, the use of interspersed system will accelerate the centerbound problems in railway lines.

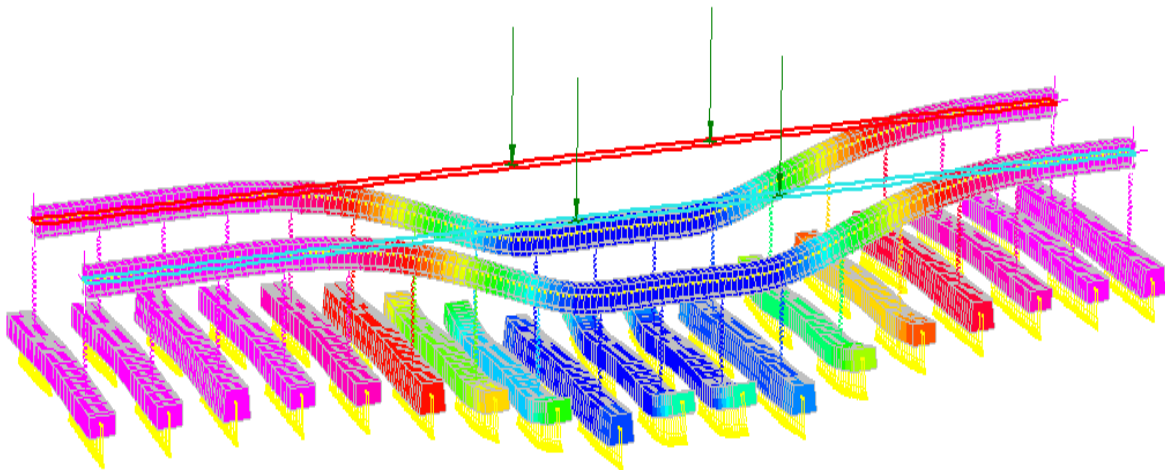


Figure 3: Dynamic responses of sleepers in the interspersed tracks

The dynamic effects of train velocity on the maximum uplift responses of sleepers can be seen in Figure 5. It is clear that the interspersed tracks have higher uplift deformation. The relative uplifts of the sleepers tend to cause deteriorations of railway tracks over time, such as ballast breakage, excessive dilation and densification, which can cause further track differential settlements. Figure 6 demonstrates the dynamic impact factor of interspersing methods coupled with train speeds on the maximum acceleration responses of the interspersed tracks. It is very clear that the heavy mass of concrete sleepers can suppress nonlinear vibration responses and secure the track through vibration control.

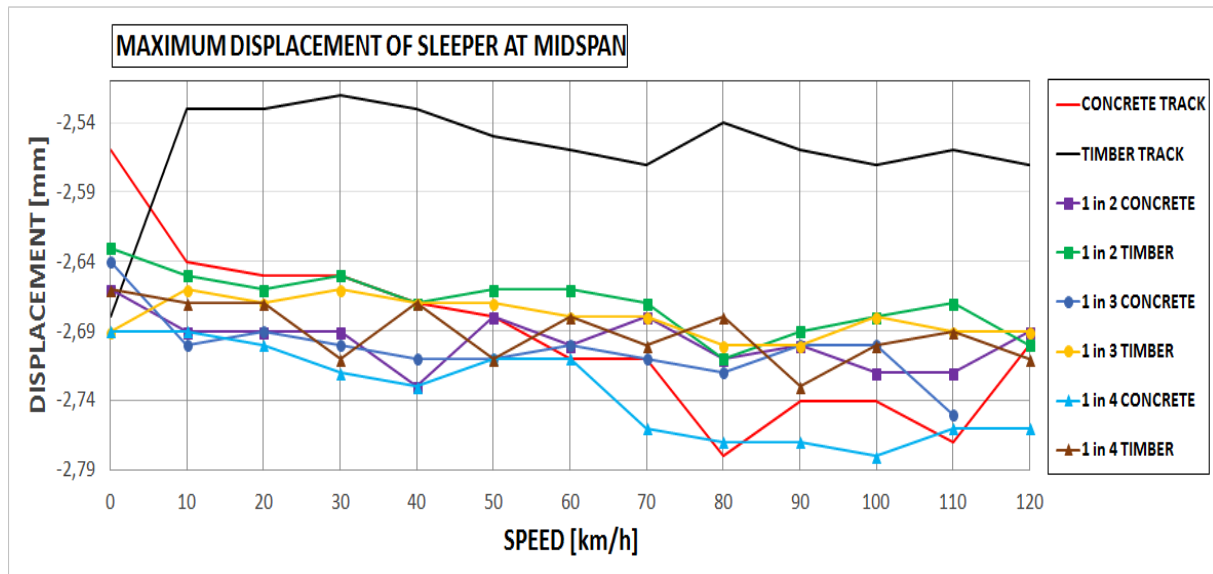


Figure 4: Maximum displacement of sleeper at midspan

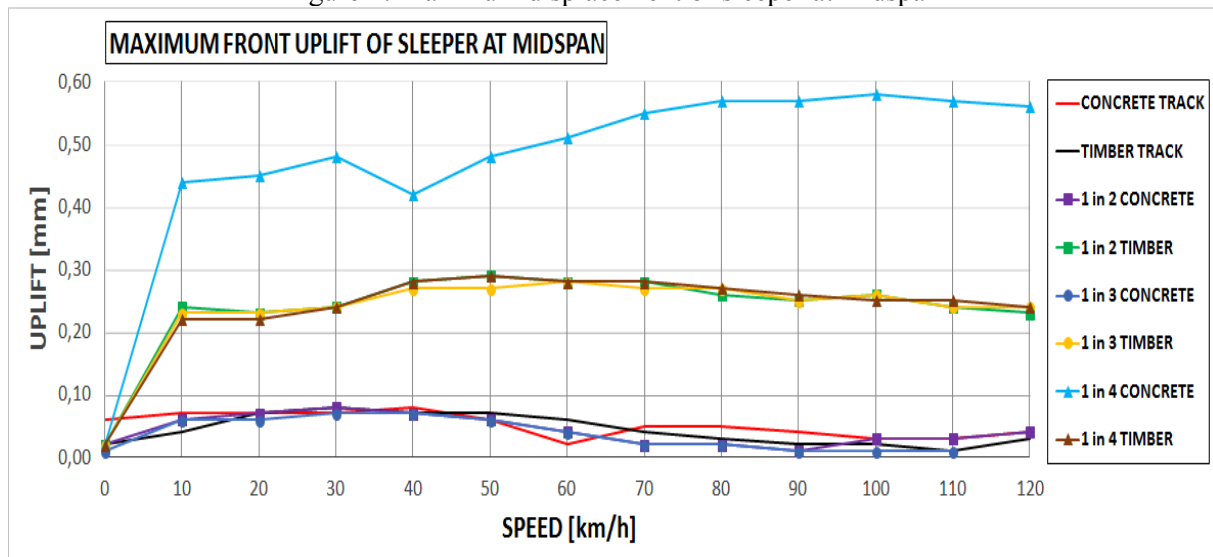


Figure 5: Maximum front uplift of sleeper at midspan

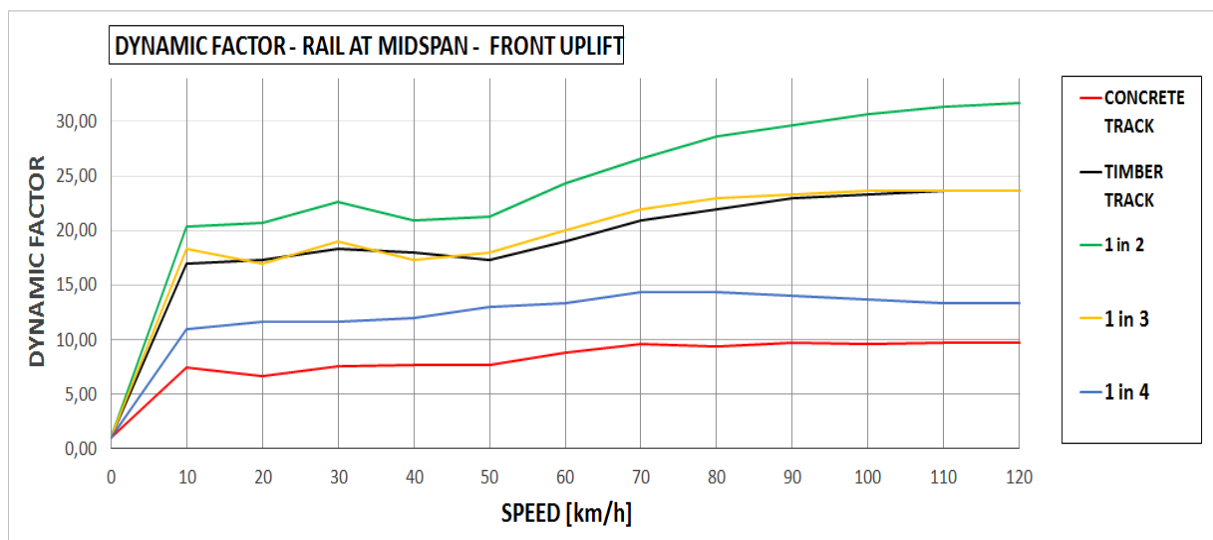


Figure 6: Dynamic factor of rail vibration at midspan (front uplift)

4 CONCLUSION

Railway industry in many countries around the world still adopts interspersed track system as a measure for spot replacement of decayed timber sleepers. Such practice is common for secondary or third class tracks where operations are not excessive. However, the practices can cause excessive track maintenance over time. This is because a cluster of timber sleepers with mixed quality could deteriorate faster than the others and the replacement by concrete sleepers could induce track stiffness inconsistency and aggravate loading conditions acting on the track. This paper is found to be the first to investigate nonlinear behaviours of the interspersed track due to a moving train load in order to understand the root cause of rapid track deterioration. A finite track models in three-dimensional space have been established and validated. The parametric studies have revealed the key insights into the actual source of track deterioration:

- Spot replacement of sleepers or interspersed tracks can deteriorate relatively faster than open-face tracks (i.e. pure concrete or timber sleepers). This is also evidenced by field monitoring.
- The cause of rapid deterioration such as track mud pumping, ballast pulverisation and ballast dilation is due to relative dynamic uplift responses of sleepers.
- Ballast dilation can be aggravated by concrete sleeper vibrations at resonance. The excessive ballast dilation can reduce lateral track stability.

ACKNOWLEDGEMENT

The first author wishes to gratefully acknowledge the Japan Society for Promotion of Science (JSPS) for his JSPS Invitation Research Fellowship (Long-term), Grant No L15701, at Track Dynamics Laboratory, Railway Technical Research Institute and at Concrete Laboratory, the University of Tokyo, Tokyo, Japan. The JSPS financially supports this work as part of the research project, entitled “Smart and reliable railway infrastructure”. Special thanks to European Commission for H2020-MSCA-RISE Project No. 691135 “RISEN: Rail Infrastructure Systems Engineering Network” (www.risen2rail.eu). In addition, the sponsorships and assistance from CEMEX, Network Rail, RSSB (Rail Safety and Standard Board, UK) and G+D Computing (Dr Erik Kostson) with respect to STRAND7 are highly appreciated. Financial support from BRIDGE Grant (Collaboration between University of Birmingham and University of Illinois at Urbana Champaign) is also gratefully acknowledged.

REFERENCES

- [1] Kohoutek, R., “Dynamic and static performance of interspersed railway track,” Proceedings of Conference on Railway Engineering, Vol 1, pp.153-159, 1991.
- [2] Kaewunruen S., Remennikov A.M., Akira A., Hirotaka S., 2014. “Free vibrations of interspersed railway track systems in three-dimensional space” *Acoustics Australia*, 42(1): 20-26, 2014.
- [3] Lake, M, Ferreira, L, Murray, M., ‘Using simulation to evaluate rail sleeper replacement alternatives’. *Transportation Research Record*, 1785:58-63, 2002.

- [4] Kaewunruen S, Mimoura S, Watanabe T, Remennikov AM, 'Remaining service life of railway prestressed concrete sleepers', International RILEM Conference on Materials, Systems and Structures in Civil Engineering, DTU, Denmark, 10p, 2016.
- [5] Kaewunruen S, Remennikov AM., Investigation of free vibrations of voided concrete sleepers in railway track system, Proceedings of the Institution of Mechanical Engineers Part F Journal of Rail and Rapid Transit, 221(4): 495-508, 2007.
- [6] Kaewunruen S, Remennikov AM., Effect of improper ballast packing/tamping on dynamic behaviours of on-track railway concrete sleeper, International Journal of Structural Stability and Dynamics 7(1): 167-177, 2007.
- [7] Kaewunruen S, Remennikov AM., Sensitivity analysis of free vibration characteristics of an in-situ railway concrete sleeper to variations of rail pad parameters, Journal of Sound and Vibration 298(1-2): 453-461, 2006.
- [8] Cai Z. Modelling of rail track dynamics and wheel/rail interaction, Ph.D. Thesis, Department of Civil Engineering, Queen's University, Ontario, Canada, 1992.
- [9] Kaewunruen, S. and Chamniprasart, K., "Damage analysis of spot replacement sleepers interspersed in ballasted railway tracks", *Proceedings of the 29th Nordic Conference on Computational Mechanics*, Chalmers University of Technology, Gotenburg, Sweden, 2016.
- [10] Kaewunruen, S., Lewandowski, T. and Chamniprasart, K., "Dynamic responses of interspersed railway tracks to moving train loads", *International Journal of Structural Stability and Dynamics*, 18(1), 2017, in press.
- [11] Kaewunruen S., Remennikov A.M., Nonlinear transient analysis of railway concrete sleepers in track systems. *International Journal of Structural Stability and Dynamics*, 8(3), 505-520, 2008.
- [12] Kaewunruen S., Remennikov A.M., Dynamic properties of railway track and its components: Recent findings and future research direction, *Insight: Non-Destructive Testing and Condition Monitoring*, 52(1): 20-22, 2010.
- [13] Kaewunruen S., Remennikov A.M., An alternative rail pad tester for measuring dynamic rail pad properties under large preloads, *Experimental Mechanics*, 48(1), 55-64, 2008.
- [14] G+D Computing, *Using Strand7: Introduction to the Strand7 finite element analysis system*, Sydney, Australia, 2001.
- [15] Kaewunruen S., Remennikov A.M., Effect of a large asymmetrical wheel burden on flexural response and failure of railway concrete sleepers in track systems, *Engineering Failure Analysis*, 15(8), 1065-1075, 2008.