

ASSESSMENT AND RETROFITTING OF A RC BUILDING THROUGH A MULTI-HAZARD APPROACH: SEISMIC RESISTANCE AND ROBUSTNESS

M. Scalvenzi¹, F. Freddi² and F. Parisi¹

¹ Dept. of Structures for Engineering and Architecture, University of Naples Federico II, Naples, Italy
e-mail: martina.scalvenzi@unina.it, fulvio.parisi@unina.it

² Dept. of Civil, Environmental & Geomatic Engineering, University College London, London, UK
e-mail: f.freddi@ucl.ac.uk

Abstract

Most of the existing buildings in seismic prone regions have been built before the publication of modern design provisions against seismic events and progressive collapse. Nonetheless, some studies have highlighted the possible interaction between earthquake resistance and structural robustness, the latter being of interest to either individual extreme hazards (e.g., blast, impact, fire) or interacting hazards (e.g., landslides produced by seismic events). While retrofit strategies to improve the seismic performance of reinforced concrete (RC) structures have been widely investigated since many years, the topic of mitigation strategies against progressive collapse received very little attention. Progressive collapse can be described as a special type of structural collapse that involves several components of the structure as consequence of an initial localised damage. The present study aims at investigating whether and how much seismic retrofitting may improve not only the earthquake resistance but also robustness. A four-storey, five-bay, RC frame building designed according to Eurocode 2 is considered as a case study. The frame was assessed by evaluating: 1) the capacity of the structure to redistribute loads after a local damaging event; 2) the seismic capacity of the structure. Non-linear static analyses, i.e., PushDown and PushOver analyses, were carried out in OpenSees to evaluate the robustness and seismic resistance of the structure, respectively. The progressive collapse capacity was evaluated under two relevant column-removal scenarios, i.e., the sudden loss of an internal and an external column, while the seismic resistance was assessed under two load distributions, i.e., proportional to the first vibration mode and to the inertia masses. Subsequently, the impact of retrofitting with carbon fibre-reinforced polymers on both structural robustness and seismic resistance was evaluated. The use of the retrofit measure allowed, on the one hand, the removal of all the shear failures due to horizontal seismic actions and, on the other hand, to increase the robustness of the structure.

Keywords: Reinforced concrete buildings, structural robustness, retrofit operation, progressive collapse, non-linear static analysis.

1 INTRODUCTION

Some iconic cases, such as the collapse of the Ronan Point Building (London, 1968) [1], the Murrah Federal Building (Oklahoma City, 1995) [2], and the World Trade Centre (New York, 2001) [3] highlighted the high consequences of progressive collapse, in terms of loss of lives and properties, significantly increasing the interest of the research community in this topic [4]. Since the 1940s, many studies focused on this research area, widely investigating various aspects of the problem by performing components [*e.g.*, [5], [6], [7]] and large-scale experimental tests [*e.g.*, [8], [9], [10], [11]], numerical modelling and simulations [*e.g.*, [12], [13], [14], [15], [16], [17]] and investigating several aspects of the design against progressive collapse [*e.g.*, [18], [19]]. These studies allowed to build up an increasing understanding of the structural response in progressive collapse scenarios, along with the definition of possible design strategies. However, design guidelines and codes [[20], [21], [22]] have been introduced only in recent years, and most of the existing buildings worldwide do not incorporate design provisions to achieve structural robustness.

Besides, existing reinforced concrete (RC) structures are often vulnerable to seismic actions, as demonstrated by many events worldwide [*e.g.*, [23]]. However, in the last few decades, there has been a significant effort from the research community in order to address these issues, and many seismic retrofit strategies are currently available and implemented in practice [*e.g.*, [24], [25], [26], [27], [28], [29]].

In contrast, a very limited number of research studies focused on the development and investigation of retrofit strategies to avoid progressive collapse for both RC and steel structures. Among the few studies addressing this problem, Vieira *et al.* [7] experimentally investigated the effectiveness of the Textile-Reinforced Mortar and Near-Surface-Mounted reinforcement techniques when applied for the strengthening of existing RC frames against disproportionate collapse, showing an increase of the ductility by a factor of 1.95. Shayanfar *et al.* [30] numerically investigated the use of several combinations of additional rebars and Carbon Fiber Reinforced Polymer (CFRP) layers for the retrofitting of 2-storey RC frame showing the improved catenary effects and the reduction of vertical displacements. Jinkoo *et al.* [31] investigated the effect of prestressing tendons on the progressive collapse performance of a RC structure by performing non-linear static and dynamic analyses investigating a 6- and a 20-storey RC structure subjected to a sudden column loss scenario.

Although the above-mentioned studies (and a few more) investigate retrofit strategies for progressive collapse resistance, the knowledge level in this field is still very limited and there is a significant need for additional studies in this direction. Moreover, the vulnerability of these structures against multiple hazards offers the opportunity for integrated retrofit strategies that otherwise would often not be economically sustainable if directed toward the improvement of the structural response against a single hazard.

Within this context and given the high vulnerability of RC buildings towards the two considered hazards (*i.e.*, seismic actions and progressive collapse scenarios), the present study investigates the influence of the seismic retrofitting based on the use of CFRP on the structural robustness of a case study RC structure.

2 CASE-STUDY STRUCTURE AND FINITE ELEMENT MODELLING

A five-storey, six-bay by four-bay RC building, designed according to Eurocode 2 [32] and only to gravity loads, and previously investigated by the authors [[33], [34], [35]] was considered for case study purposes (see Figure 1). The building has a constant inter-storey height of 3 m and span lengths along the x - and y -directions equal to 5 m. Columns have a 400×400 mm² square section, whereas beams are 300×500 mm² at each floor. Concrete class C20/25

and steel reinforcement bars B450C were employed in the design. Uniform longitudinal reinforcement consisting of and $6\phi 18$ and $8\phi 18$ were used for columns and beams, respectively. The same transverse steel reinforcement of $\phi 18$ stirrups with 200 mm spacing and a concrete cover of 40 mm were used for both beams and columns.

A two-dimensional Finite Element (FE) model of the external frame in x -direction was developed in OpenSees [36]. A spread plasticity approach with displacement-based fibre formulation was used, and each cross-section was discretised in 120 fibres: one hundred fibres relating to the confined concrete (*i.e.*, the concrete core) and twenty for the concrete cover. The stress-strain concrete behaviour was simulated through the uniaxial Kent-Scott-Park concrete model [37] (*i.e.*, ‘Concrete01’ in OpenSees), while a uniaxial bilinear model with kinematic hardening set to 0.01 was adopted to simulate the steel behaviour (*i.e.*, ‘Steel01’ in OpenSees). The characteristic cylinder compressive strength of concrete, f_{ck} , was set to 20 MPa. The characteristic yield strength, f_{yk} , and Young’s modulus of the reinforcing steel, E_0 , were set equal to 450 MPa and 200 GPa, respectively. The loads were applied as concentrated loads on the beams following a discretisation of the structure in which each beam element was subdivided into 5 parts. Masses were concentrated at beam-column intersections while beam-column joints were modelled as rigid. Geometric non-linearities in the form of both large displacements/rotations and P-Delta effects were considered by means of a total corotational transformation.

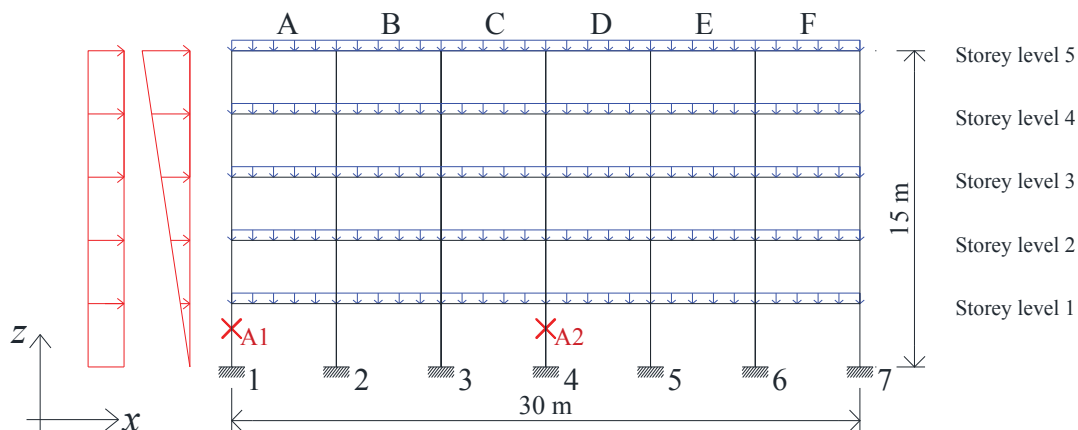


Figure 1: Reference frame model

3 PROGRESSIVE COLLAPSE ANALYSIS METHODS

The present Section investigates three different strategies for progressive collapse simulations. As shown in Figure 1, two different column removal scenarios were considered, *i.e.*, scenario A1 and A2. Loads were applied according to the accidental load combination, as per UFC [21] guidelines:

$$Q_{bd} = 1.2 DL + 0.5LL \quad (1)$$

where DL and LL indicate the dead and live loads, respectively equal to 3 kN/m^2 and 2 kN/m^2 .

A FE model in Seismostruct [38] was previously developed by the authors [35] for the case study frame, allowing the comparison of the numerical results and increasing confidence in the modelling strategy. The comparison was initially carried out in terms of modal properties showing a good match, *i.e.*, the first vibration periods were 0.35 sec and 0.37 sec for the Seismostruct and OpenSees model, respectively, while the second and third vibration periods

were coincident. A further comparison was carried out investigating the behaviour under the progressive collapse scenarios. In particular, the results of Incremental Dynamic Analysis (IDA) carried out in the previous study [35] were compared with the PushDown Analysis (PDA) carried out in this study. The Dynamic Amplification Factor (DAF) is used in the PDAs in order to simulate the dynamic effects. Figure 2 shows three different approaches used to carry out the PDAs, allowing the identification of the most appropriate one in terms of convergence and analysis' accuracy. The following approaches are evaluated:

- The '*Approach A*' is characterised by two Analyses (see Figure 2(a)). '*Analysis 1*' consists of a standard load control static analysis of the 'undamaged' structure, allowing the definition of the reaction force (R) of the column where the column loss is successively simulated. During '*Analysis 2*' the column removal is simulated by two steps. '*Step 1*', represented in Figure 2(a), allows simulating the presence of the column before the removal. The equivalent upward force F is applied to the frame, which entity corresponds to the vertical load previously detected on that column. In this Step, the gravity loads and the force F, are monotonically increased until the target value. In the following '*Step 2*', represented in Figure 2(a), a downward force F (equal to R in terms of values and opposite in terms of direction) is applied to simulate the column removal. Moreover, the loads on the beams adjacent to the removal are amplified with the DAF. This second set of loads are thus gradually applied.
- The '*Approach B*' is characterised by a single step (see Figure 2(b)), consisting in a displacement control analysis with the application of design loads amplified by the DAF. This approach, differently from '*Approach A*' neglects the initial condition before the collapse but allows an easier implementation of the analysis. In addition, the displacement control strategy allows the convergence of the analysis for larger displacements hence better simulating the catenary effects.
- The '*Approach C*' is characterised by two Steps (see Figure 2(c)). '*Step 1*' represented in Figure 2(c) consists of a standard load control static analysis of the 'damaged' structure with the application of the design loads. In the following '*Step 2*' a displacement control analysis is performed with the design loads amplified by the DAF.

The present Section of the work investigates the intensity of the DAF parameter by the comparison of the results of the PDAs and IDA. For this reason, the DAF was considered unitary during these preliminary analyses.

The results of the PDAs were obtained in terms of α - θ curves, in which α represents the design load multiplier and θ the vertical drift of the control point. Specifically, α was obtained, according to Eq. 2, as the ratio between the sum of the reaction values, relative to the base constraints, and the sum of the loads applied to the structure. The vertical drift was obtained as the ratio between the vertical displacement of the control point, v , and the beam length, L , according to Eq. 3; the control point was coincident with the upper joint of the removed column.

$$\alpha = \frac{\sum_i R_i}{\sum_i R_i(Qbd)} \quad (2)$$

$$\theta = \arctg \frac{v}{L} \quad (3)$$

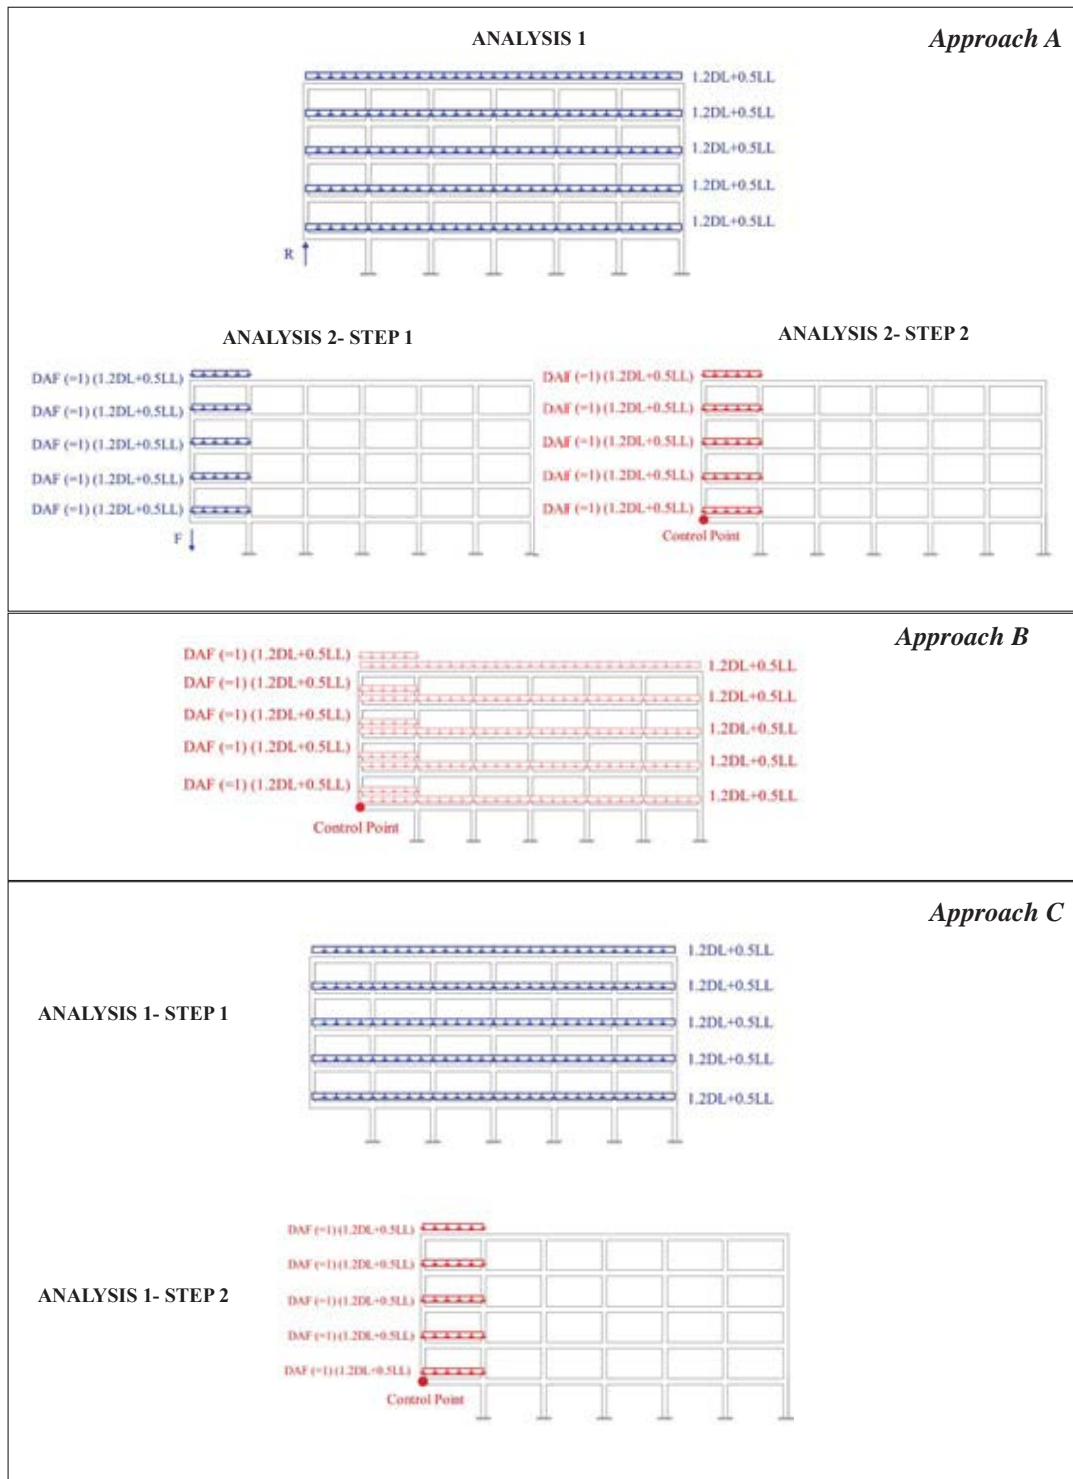


Figure 2: Approaches used for PushDown Analysis (PDA) (scenario A1).

The comparison between PDAs and IDA is shown in Figure 3. Through these results, the specific DAF (DAF_{sp}) was assessed as the ratio between the values of the load multipliers, α , obtained from both analyses, as follows:

$$DAF_{sp} = \frac{\alpha_{PDA}}{\alpha_{IDA}} \quad (4)$$

The results of the PDAs overestimated the design load multiplier, α , overestimating the capacity of the structure. This is related to the lack of consideration of the dynamic amplification during these analyses since the DAF was set equal to 1. However, this preliminary assumption allowed the evaluation of the DAF (DAF_{sp}) based on the results of the PDAs and IDA according to Eq. 4. The DAF_{sp} for the three Approaches and for the two removal Scenarios is shown in Figure 4. Figure 4 shows that Approaches A and C provide DAF values lower than the unit for high values of θ . The Approach B, on the other hand, led to a more realistic estimate of the DAF. Indeed, its value is always higher than the unit for both scenarios up to large vertical drift values and is aligned with DAF values obtained from other studies in the literature [40]. Approach B, with the corresponding value of the DAF, was chosen as the analysis method for the following part of the study. The DAF was set equal to 1.16, corresponding to a value of plastic rotation of 0.03 rads, as suggested by UFC (table 4-1); the yield rotation was calculated based on the recommendations of the Eurocode 8 [39].

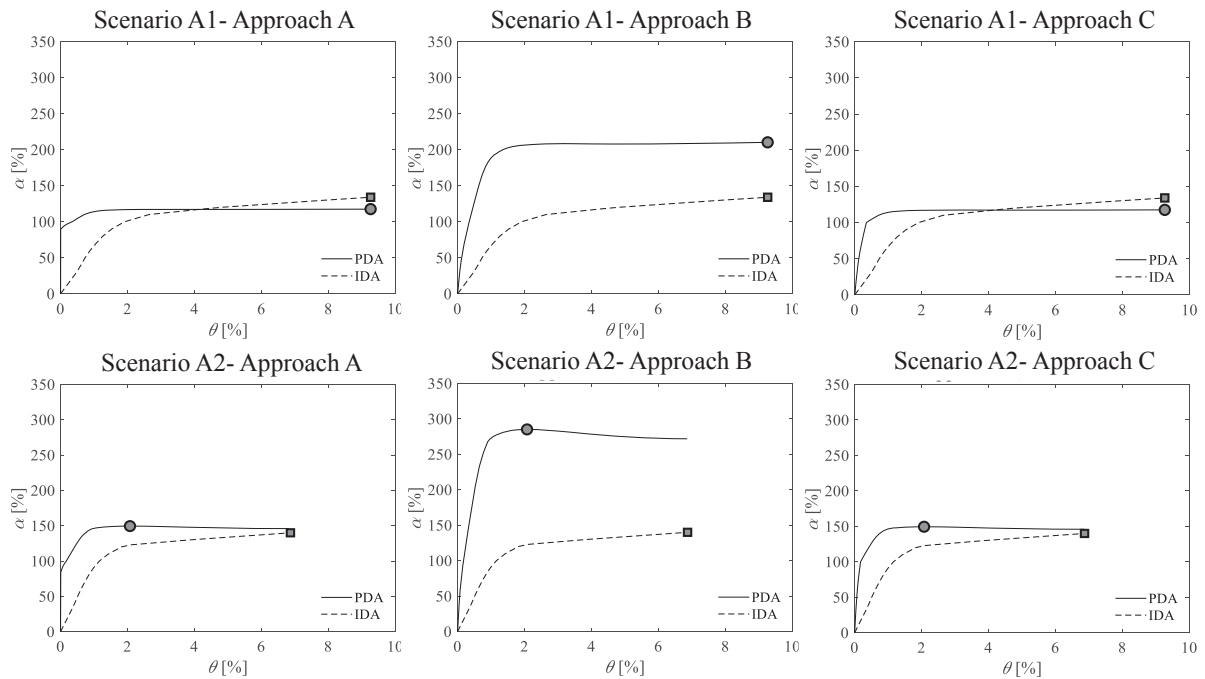


Figure 3: Comparison between PushDown analysis (PDA) and Incremental Dynamic Analysis (IDA).

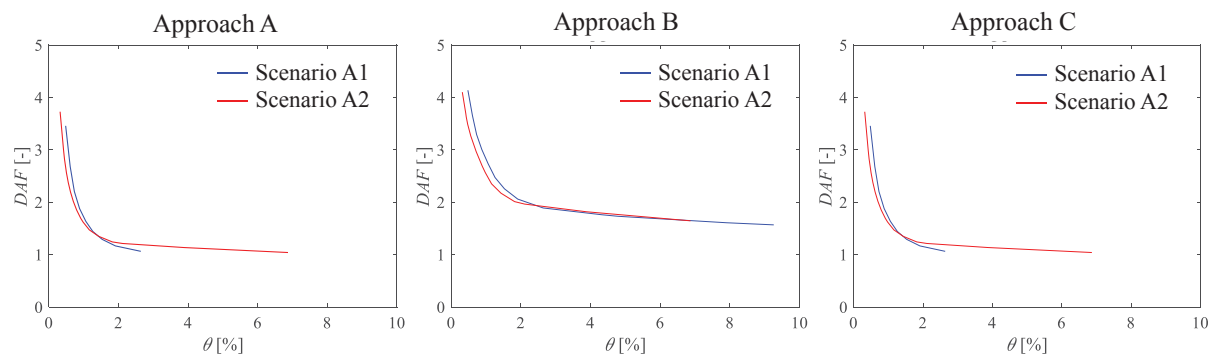


Figure 4: Dynamic Amplification Factor (DAF) assessment.

4 PROGRESSIVE COLLAPSE AND SEISMIC ANALYSIS

4.1 Progressive collapse resistance assessment

Progressive collapse analyses were carried out to assess structural robustness under the two column-removal scenarios previously discussed and shown in Figure 1. Unlike previous studies [[33], [34], [35]], in which a building perimeter frame was considered, the structural system is herein supposed to be an internal primary frame. This led to an increase of design loads applied on beams equal to 23 kN/m according to Eq. 1.

The α - θ curves for the two scenarios and obtained with the PDAs are shown in Figure 5. For both scenarios, Figure 5 shows that the structure lack of robustness with shear failures of the beams corresponding to α values of 33.05 and 47.61, respectively, for scenarios A1 and A2. The degrading model of Biskinis and Fardis [41] was used for shear checks.

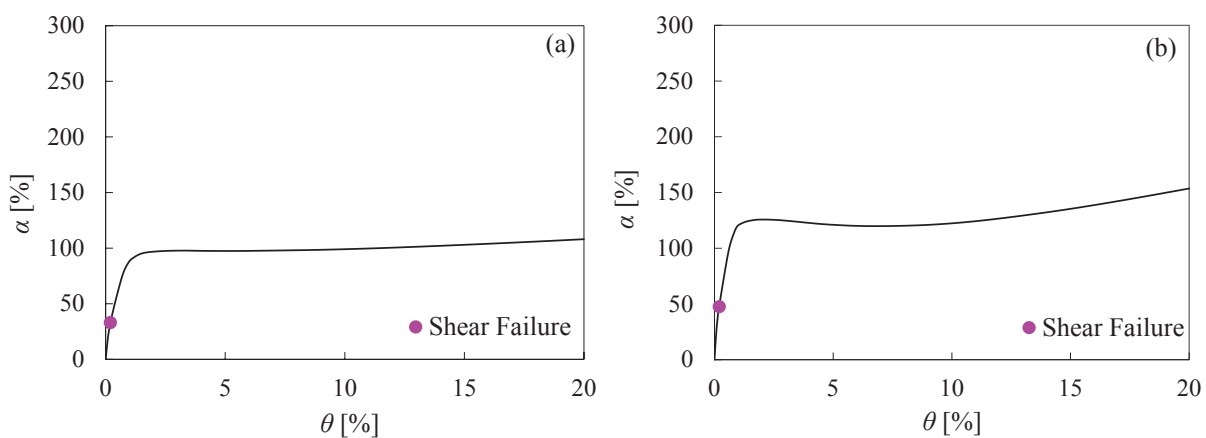


Figure 5: Pushdown analysis results: (a) scenario A1, (b) scenario A2.

4.1 Seismic safety assessment

In order to evaluate the seismic capacity of the structure, global and local checks were carried out through non-linear static analysis performed according to NTC 2018 [42]. The construction site was coincident with L'Aquila (Abruzzo, Italy), the reference life of the structure, V_R , was 50 years and soil and topographic category were B and T_I , respectively; the PGA was equal to 0,301g. Two different load distribution, such as the MODE and a MASS distribution, were considered. Local checks showed that almost all elements, vertical and horizontal, were subjected to brittle failures, as underlined by the demand/capacity ratios collected in Tables 2 and 3 (Bold values in the tables indicate demand/capacity ratios greater than 1). These checks were carried out step-by-step, and they were performed in correspondence of a single step, *i.e.*, that related to the identified performance point. The global checks compared the required inelastic displacement, $S_{d,inel}$ with the ultimate displacement of the structure, d_u . This comparison was performed in the ADRS plane, allowing the comparison between the demand spectrum and the capacity curve. The intersection between the demand spectrum with the extension of the elastic branch provided the performance point. The results are shown in Figure 6, with the relative demand/capacity ratios.

Floor level	Column Line													
	Mass distribution							Mode distribution						
	1	2	3	4	5	6	7	1	2	3	4	5	6	7
1	2.03	2.07	2.14	2.19	2.25	2.32	2.04	1.59	1.81	1.93	2.03	2.12	2.21	1.89
2	1.60	2.20	2.14	2.09	2.04	1.98	0.90	1.80	2.25	2.24	2.20	2.16	2.12	0.98
3	1.15	1.86	1.77	1.68	1.58	1.48	1.02	1.46	2.16	2.07	1.98	1.88	1.78	1.17
4	0.70	1.39	1.32	1.25	1.19	1.13	0.74	1.04	1.76	1.67	1.58	1.50	1.42	0.91
5	0.02	0.81	0.79	0.75	0.71	0.63	0.60	0.18	1.12	1.05	0.99	0.93	0.81	0.65

Table 1: Columns' demand/capacity ratios.

Floor level	Beam Span											
	Mass distribution						Mode distribution					
	A	B	C	D	E	F	A	B	C	D	E	F
1	2.36	2.24	2.25	2.25	2.24	2.28	2.24	2.18	2.21	2.23	2.25	2.28
2	2.20	2.06	2.02	1.97	1.92	1.89	2.32	2.18	2.14	2.10	2.06	2.03
3	1.82	1.70	1.66	1.61	1.56	1.53	2.05	1.90	1.85	1.80	1.74	1.72
4	1.36	1.33	1.29	1.26	1.23	1.19	1.58	1.51	1.46	1.42	1.37	1.32
5	1.36	1.33	1.29	1.26	1.23	1.19	1.13	1.01	1.00	0.98	0.98	0.89

Table 2: Beams' demand/capacity ratios.

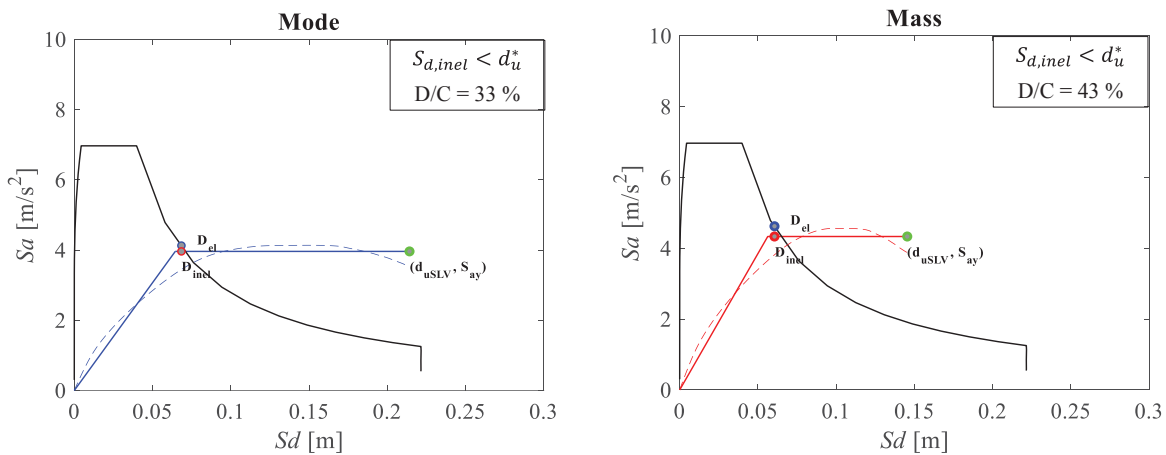


Figure 6: Global checks

5 INFLUENCE OF SEISMIC RETROFITTING ON STRUCTURAL ROBUSTNESS

The analysis results outlined the need to adopt a retrofit measure in order to prevent brittle failures occurring as a consequence of both considered hazards. In this study, the application of CFRP was investigated as it represents a widely used strategy to improve the seismic performances of RC frames. The impact of this retrofit strategy on the structural robustness was successively evaluated. The CFRP were applied differently on vertical and horizontal elements so as to eliminate brittle failures. A single bandage ply was used for the beams, while a different composition was considered for the columns. Five layers of CFRP plies, coinciding with the limit set by CNR-DT 200 R1/2013 [43], were used for the first floor level; three and two layers of plies were used for second and third floor level, respectively, while a single layer of ply was applied for fourth and fifth floor level. The analysis results showed that the application of CFRP allowed the removal of all the shear failures due to the seismic action, obtaining values of demand/capacity ratios lower than the unit.

Additionally, this retrofit measure had a beneficial effect, also improving the structural robustness of the frame under both column removal scenarios, as shown in figure 7. The first brittle failure, for both cases, occurred for a higher multiplier value than in the case of the existing structure. In scenario

A2, the retrofitted structure is able to avoid progressive collapse and at the same time was characterised by little damage, as low drift values were reached. A lower increase of structural performance was observed for scenario A1 where shear failures are observed for α values just above 100% *i.e.*, $\alpha = 101.64$, yet achieving structural robustness under the considered design loads. In this case, however, the activation of the alternative load path required large displacements, *i.e.*, exceeded 10% of vertical drift, corresponding to a damage level significantly greater than in the previous scenario.

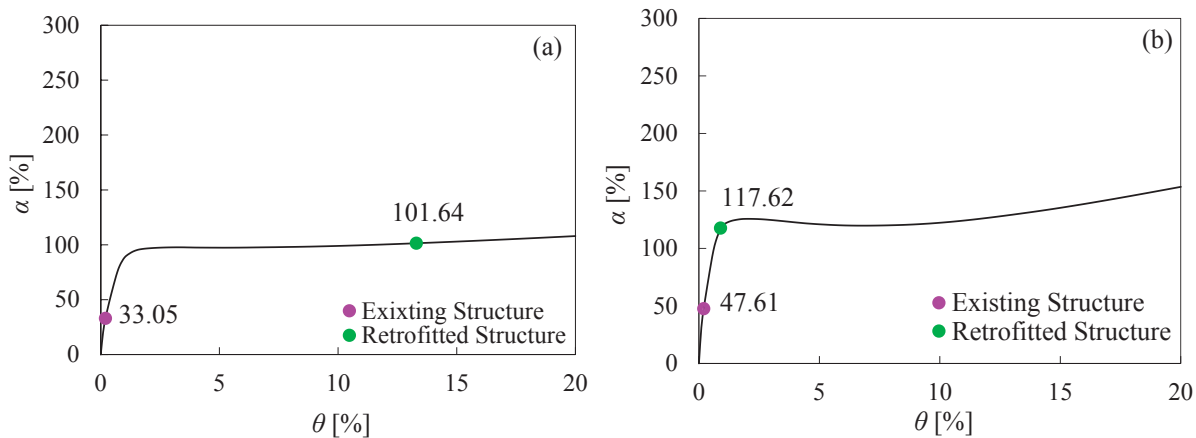


Figure 7: Impact of retrofit measure on structural robustness: (a) scenario A1, (b) scenario A2.

6 CONCLUSIONS

In this study, the structural capacity of RC framed structure through a multi-hazard approach was investigated. The impact of a retrofit measure, by the application of Carbon Fibre Reinforced Polymer (CFRP), on structural robustness was assessed. Non-linear static analyses were carried out to evaluate the structure's seismic capacity and its resistance to progressive collapse. The results of the analyses showed the need for retrofitting in order to eliminate brittle failures and to increase the structural capacity. The study also provided some insights into the methodologies for progressive collapse analysis using non-linear static procedures. Three Approaches (*i.e.*, A, B and C) were investigated and compared with the results of non-linear dynamic analysis previously performed on the same case study structure. The following conclusions can be drawn: (i) among the alternative options for progressive collapse resistance assessment, a more realistic estimate of the dynamic amplification factor was obtained with Approach B; (ii) the seismic safety and structural robustness are limited by premature brittle failures and (iii) the use of CFRP as a retrofit measure was efficient for the case study structure, leading to the removal of all the shear failures due to the seismic action. On the other hand, the introduction of this retrofit measure allows obtaining a positive result also in terms of structural robustness.

REFERENCES

- [1] C. Pearson, N. Delatte, Ronan point apartment tower collapse and its effect on building codes. *Journal of Performance of Constructed Facilities*, **19**, 172–177, 2005.
- [2] A. Kazemi-Moghaddam, M. Sasani, Progressive collapse evaluation of Murrah Federal Building following sudden loss of column G20. *Engineering Structures*, **89**, 162–171, 2015.

-
- [3] Z. Bažant, M. Verdure, Mechanics of progressive collapse: Learning from World Trade Center and building demolitions. *Journal of Engineering Mechanics*, **133**, 308–319, 2007.
- [4] J.M. Adam, F. Parisi, J. Sagaseta, X. Lu, Research and practice on progressive collapse and robustness of building structures in the 21st century. *Engineering Structures*, **173**, 122-149, 2018.
- [5] J. Yu, K.H. Tan, Experimental and numerical investigation on progressive collapse resistance of reinforced concrete beam column sub-assemblages. *Engineering Structures*, **55**, 90-106, 2013.
- [6] M. D’Antimo, M. Latour, G. Rizzano, J.F. Demonceau, Experimental and numerical assessment of steel beams under impact loadings. *Journal of Constructional Steel Research*, **158**, 230–247, 2019.
- [7] A.D.A. Vieira, S.P. Triantafyllou, D.A. Bournas, Strengthening of RC frame subassemblies against progressive collapse using TRM and NSM reinforcement. *Engineering Structures*, **207**, 110002, 2020.
- [8] R. Zandonini, N. Baldassino, F. Freddi, Robustness of steel-concrete flooring systems. An experimental assessment. *Stahlbau*, **83**(9), 608–613, 2014.
- [9] E.S. Johnson, J.E. Meissner, L.A. Fahnestock, Experimental Behavior of a Half-Scale Steel Concrete Composite Floor System Subjected to Column Removal Scenarios. *Journal of Structural Engineering (ASCE)*, **142**(2), 04015133, 1-12, 2016.
- [10] R. Zandonini, N. Baldassino, F. Freddi, G. Roverso, Steel-Concrete Composite Frames under the Column Loss Scenario: an Experimental study. *Journal of Constructional Steel Research*, **162**, 105527, 2019.
- [11] N. Stathas, I. Karakasis, E. Strepelias, X. Palios, S. Bousias, M.N. Fardis. Tests and analysis of RC building, with or without masonry infills, for instant column loss. *Engineering Structures*, **193**, 57–67, 2019.
- [12] H.Z. Jahromi, A.G. Vlassis, B.A. Izzuddin, Modelling approaches for robustness assessment of multi-storey steel-composite buildings. *Engineering Structures*, **51**, 278–294, 2013.
- [13] V. De Biagi, F. Parisi, D. Asprone, B. Chiaia, G. Manfredi, Collapse resistance assessment through the implementation of progressive damage in finite element codes. *Engineering Structures*, **136**, 523-534, 2017.
- [14] D. Stephen, D. Lam, J. Forth, J. Ye, K.D. Tsavdaridis, An evaluation of modelling approaches and column removal time on progressive collapse of building. *Journal of Constructional Steel Research*, **153**, 243-253, 2019.
- [15] C. Dimopoulos, F. Freddi, T.L. Karavasilis, G. Vasdravellis, Progressive collapse of Self-Centering moment resisting frames. *Engineering Structures*, **208**: 109923, 2020.
- [16] G. Mucedero, E. Brunesi, F. Parisi, Non-linear material modelling for fibre-based progressive collapse analysis of RC framed buildings. *Engineering Failure Analysis*, **118**, 104901, 2020.
- [17] A.F. Santos, A. Santiago, M. Latour, G. Rizzano, Robustness analysis of steel frames subjected to vehicle collisions, *Structures*, **25**, 930-942, 2020.

-
- [18] A.G. Vlassis, B.A. Izzuddin, A.Y. Elghazouli, D.A. Nethercot, Design oriented approach for progressive collapse assessment of steel framed buildings. *Structural Engineering International*, **16**(2), 129-136, 2006.
- [19] N. Hoffman, U. Kuhlmann, J.F. Demonceau, J.P. Jaspart, N. Baldassino, F. Freddi, R. Zandonini, Robust impact design of steel and composite building structures: The Alternate Load Path Approach. *IABSE Workshop 2015, Safety, Robustness and Condition Assessments of Structures*, Helsinki, Finland, 2015.
- [20] EN1991–1–7. Eurocode 1: Actions on structures – Part 1–7: General actions – Accidental actions. European Standard EN 1991–1–7. *European Committee for Standardization (CEN)*, Brussels, Belgium, 2006.
- [21] DoD. Unified Facilities Criteria (UFC) – Design of structures to resist progressive collapse. 4-023-0314, July 2009 – Change 3, 1 November 2016. *United States Department of Defense (DoD)*, 2016.
- [22] GSA. Progressive collapse analysis and design guidelines for new federal office buildings and major modernization projects. *General Services Administration*, Washington, DC, 2003.
- [23] F. Freddi, V. Novelli, R. Gentile, E. Velu, A. Andonov, S. Andreev, F. Greco, E. Zhuleku, Observations from the 26th November 2019 Albania Earthquake: the Earthquake Engineering Field Investigation Team (EEFIT) mission. *Bulletin of Earthquake Engineering* 2021. <https://doi.org/10.1007/s10518-021-01062-8>
- [24] S. Pampanin, D. Bolognini, A. Pavese. Performance-Based Seismic Retrofit Strategy for Existing Reinforced Concrete Frame Systems Using Fiber-Reinforced Polymer Composites. *Journal of Composites for Construction*, **11**(2), 211-226, 2007.
- [25] F. Freddi, E. Tubaldi, L. Ragni, A. Dall’Asta, Probabilistic Performance Assessment of low-ductility RC frames retrofitted with dissipative braces. *Earthquake Engineering and Structural Dynamics*, **42**(7), 993-1011, 2013.
- [26] N. Augenti, A. Nanni, F. Parisi, Construction failures and innovative retrofitting. *Buildings*, **3**(1), 100-121, 2013.
- [27] L. Gioiella, E. Tubaldi, F. Gara, L. Dezi, A. Dall’Asta. Modal properties and seismic behaviour of buildings equipped with external dissipative pinned rocking braced frames. *Engineering Structures*, **172**, 807-819, 2018.
- [28] F. Freddi, E. Tubaldi, A. Zona, A. Dall’Asta. Seismic performance of dual systems coupling moment-resisting frames and buckling-restrained braced frames. *Earthquake Engineering and Structural Dynamics*, **50**(2): 329–353, 2021.
- [29] R. Gentile, C. Galasso, Simplified seismic loss assessment for optimal structural retrofit of RC buildings. *Earthquake Spectra*, **37**(1), 346-365, 2021.
- [30] M. Shayanfar, M. Bigonah, D. Sobhani, M. Zabihi-Samani. The Effectiveness Investigation of New Retrofitting Techniques for RC Frame against Progressive Collapse. *Civil Engineering Journal*, **4**(9), 2018.
- [31] K. Jinkoo, S. Woo-Seung, Retrofit of RC frames against progressive collapse using prestressing tendons. *The Structural Design of Tall and Special Buildings*, **22**, 349–361, 2013.

- [32] CEN, European Committee for Standardization. EN 1992-1-1. Eurocode 2 (EC2): design of concrete structures – Part 1. 1: General rules and rules for buildings. Brussels; 2004.
- [33] E. Brunesi, R. Nascimbene, F. Parisi, N. Augenti, Progressive collapse fragility of reinforced concrete framed structures through incremental dynamic analysis. *Engineering Structures*, **104**, 65–79, 2015.
- [34] E. Brunesi, F. Parisi, Progressive collapse fragility models of European reinforced concrete framed buildings based on pushdown analysis. *Engineering Structures*, **152**, 579–596, 2017.
- [35] F. Parisi, M. Scalvenzi, E. Brunesi, Performance limit states for progressive collapse analysis of reinforced concrete framed buildings. *Structural Concrete*, **20**, 68–84, 2019.
- [36] F. McKenna, G.L. Fenves, M.H. Scott. Open system for earthquake engineering simulation (OpenSees) 2000.
- [37] B.D. Scott, R. Park, M.J.N. Priestley, Stress–strain behavior of concrete confined by overlapping hoops at low and high strain rates. *ACI Journal*, **79**(1), 13–27, 1982.
- [38] Seismosoft. SeismoStruct—A computer program for static and dynamic non-linear analysis of framed structures. 2016. Available from: www.seismosoft.com.
- [39] EN 1998-1 (2004) (English): Eurocode 8: Design of structures for earthquake resistance – Part 1: General rules, seismic actions and rules for buildings
- [40] E. Brunesi and F. Parisi. Progressive collapse fragility models of European reinforced concrete framed buildings based on pushdown analysis. *Engineering Structures*, **152**, 579-596, 2017.
- [41] D.E. Biskinis, G.K. Roupakias, M.N. Fardis, Degradation of shear strength of reinforced concrete members with inelastic cyclic displacement. *ACI Structural Journal*, **101**(6), 773-783, 2004.
- [42] CS.LL.PP. NTC 2018, Aggiornamento delle «Norme tecniche per le costruzioni», *Gazzetta Ufficiale della Repubblica Italiana* 42, 2018.
- [43] CNR-DT 200 R1/2013. Guide for the Design and Construction of Externally Bonded FRP Systems for Strengthening Existing Structures. *CNR – Advisory Committee on Technical Recommendations for Construction*, 2013.